

# ENERFLEX

## S200 Standard Booster Package

DRIVER:	Cat 3306TA - 203HP
DRIVER SPEED:	1800 rpm
COMPRESSOR:	Frick TDSH 233S
SPEED INCREASER:	N/A
COMPRESSOR SPEED:	1800 rpm
PACKAGE RATED PRESSURE:	375 psig @ 250°F


### PROCESS DESIGN

Suct Temperature:	60 °F
Amb. Temperature:	90 °F
Altitude:	2500 ft
Gas Sp. Gr.:	0.6
Gas K Value:	1.3
Discharge pressure:	see graph
Engine auxiliary power:	10 HP


**All pressures shown are at skid edge**

**Please consult Enerflex for any special ratings outside these ranges.**


### FLOW CURVE (flow rates guaranteed to +/- 5%)

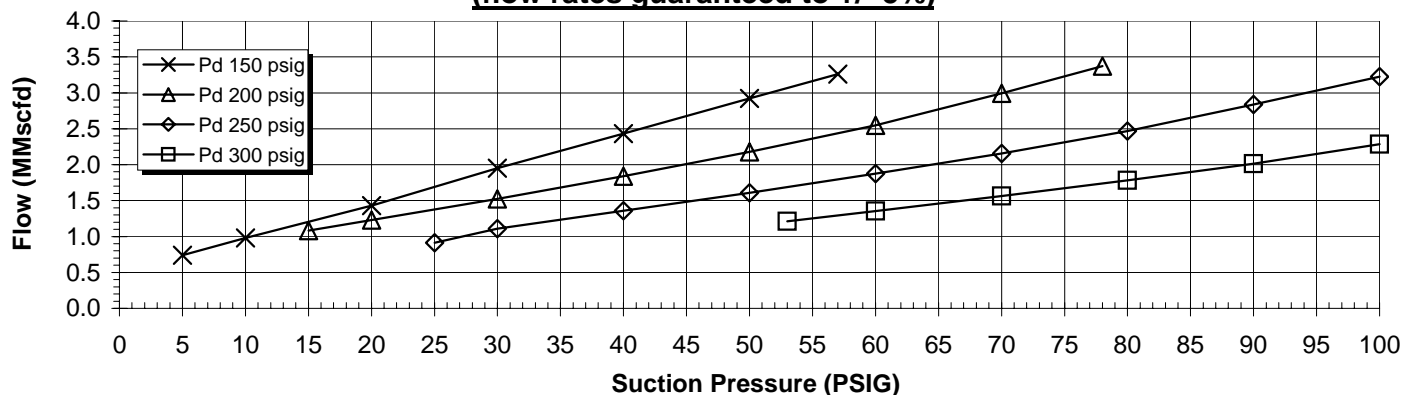

### POWER CURVE

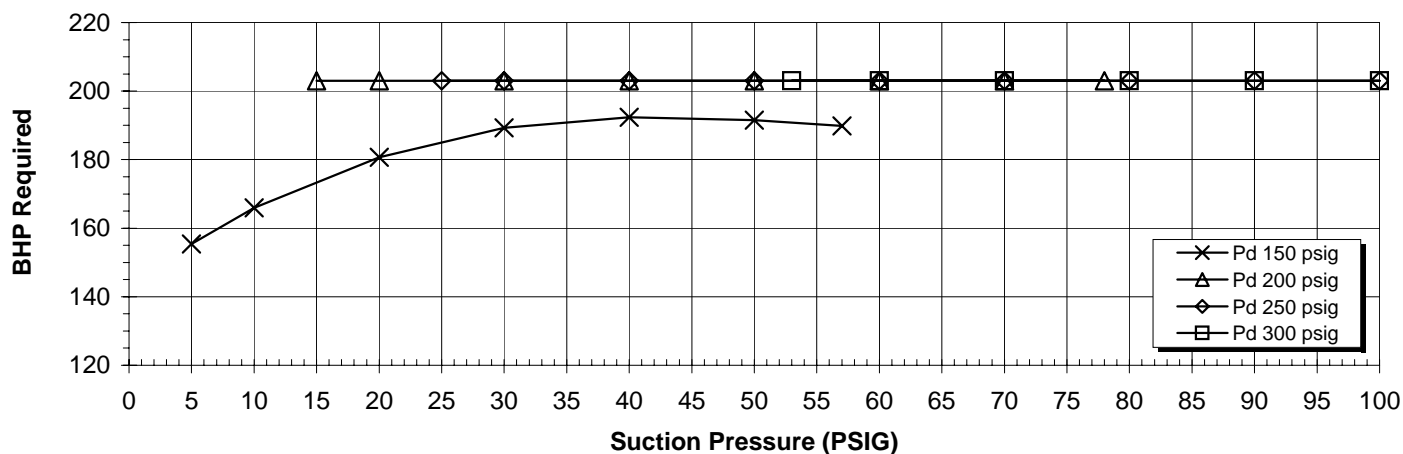

### CAPACITY CURVE

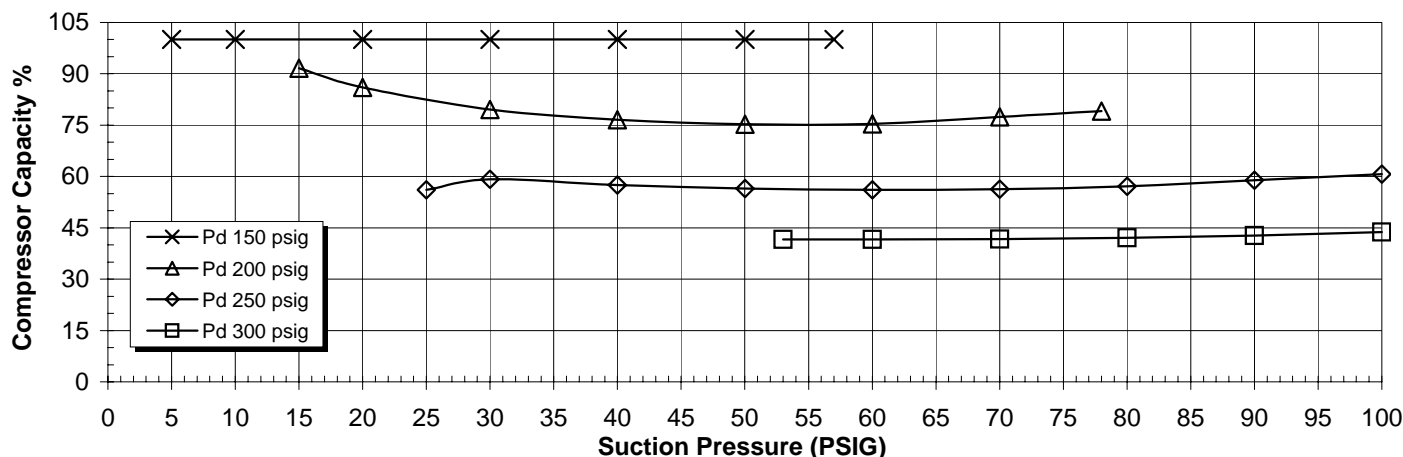

\*NOTE: Slide valve position is not indicative of compressor capacity.